

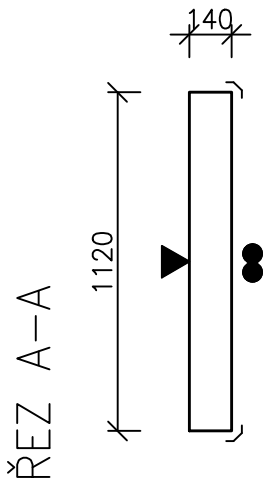



SCHODIŠŤOVÉ RAMENO R2–TVAR–3x3ks
POHLED SHORA

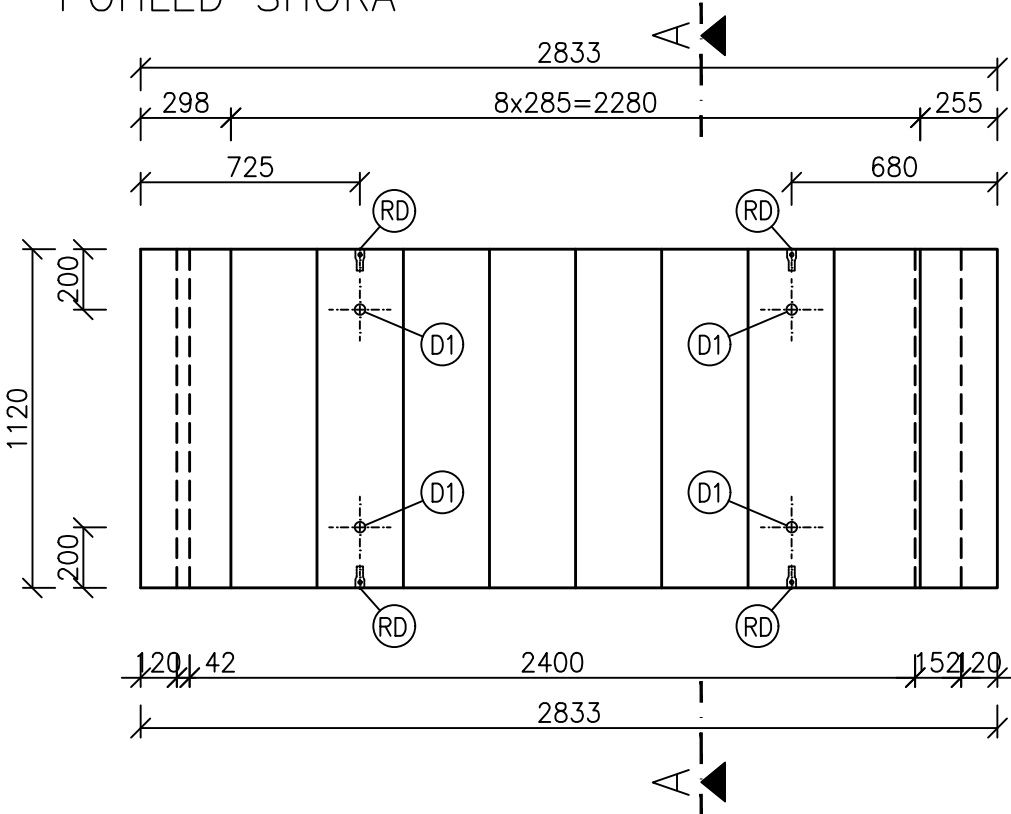


SCHODIŠŤOVÉ RAMENO R2–VÝZTUŽ–3x3ks
POHLED SHORA

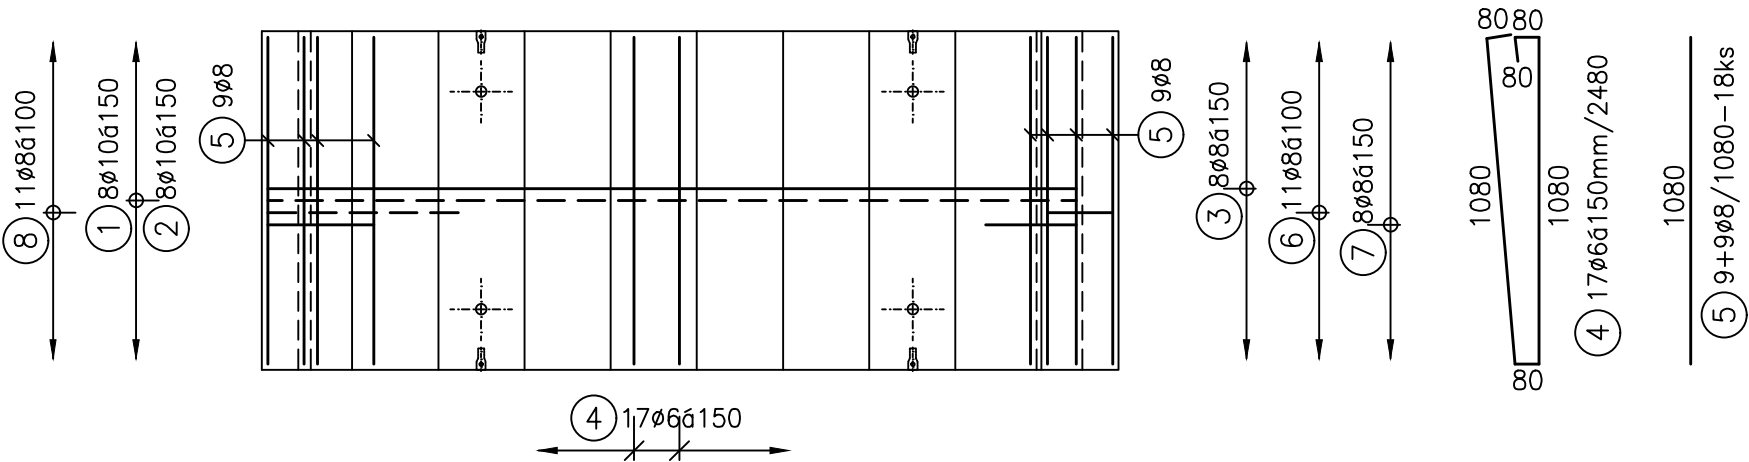

POHLED Z BOKU

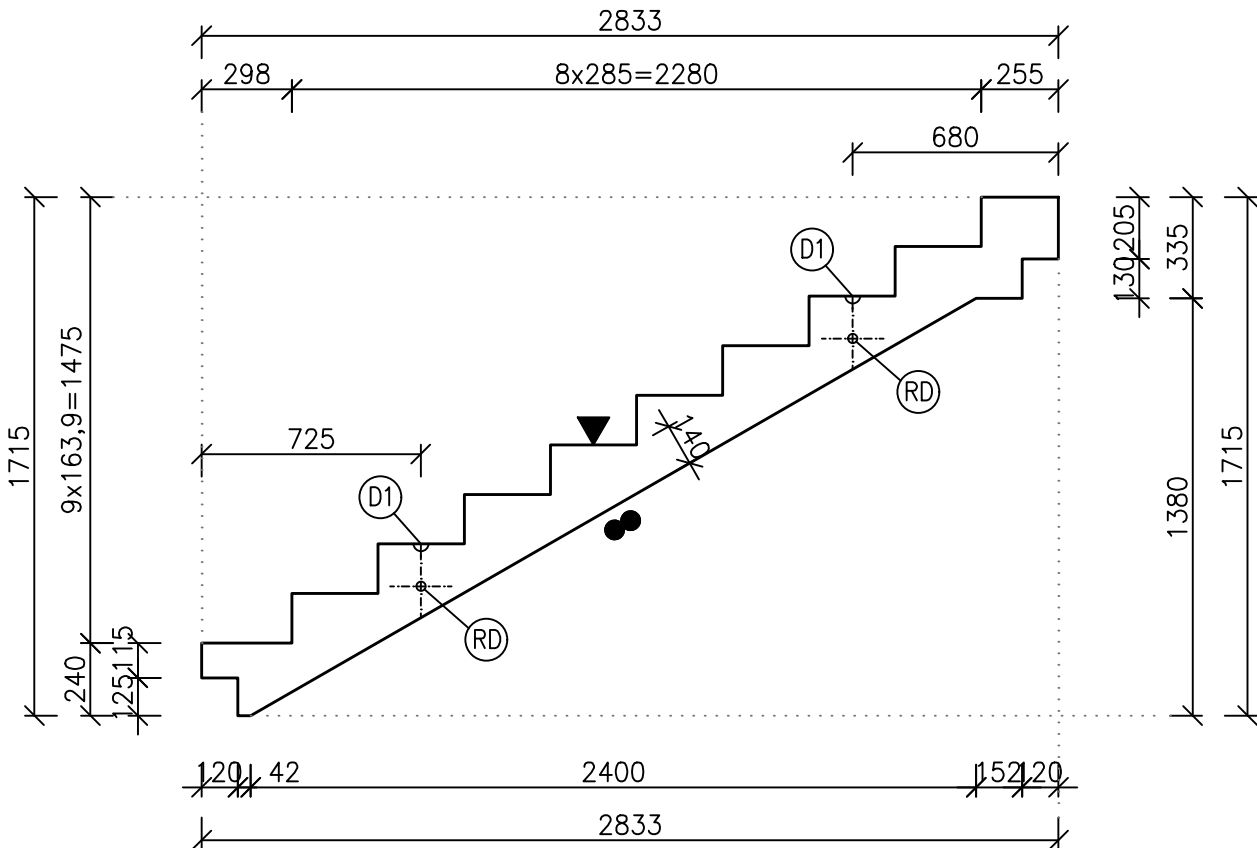

POHLED Z BOKU

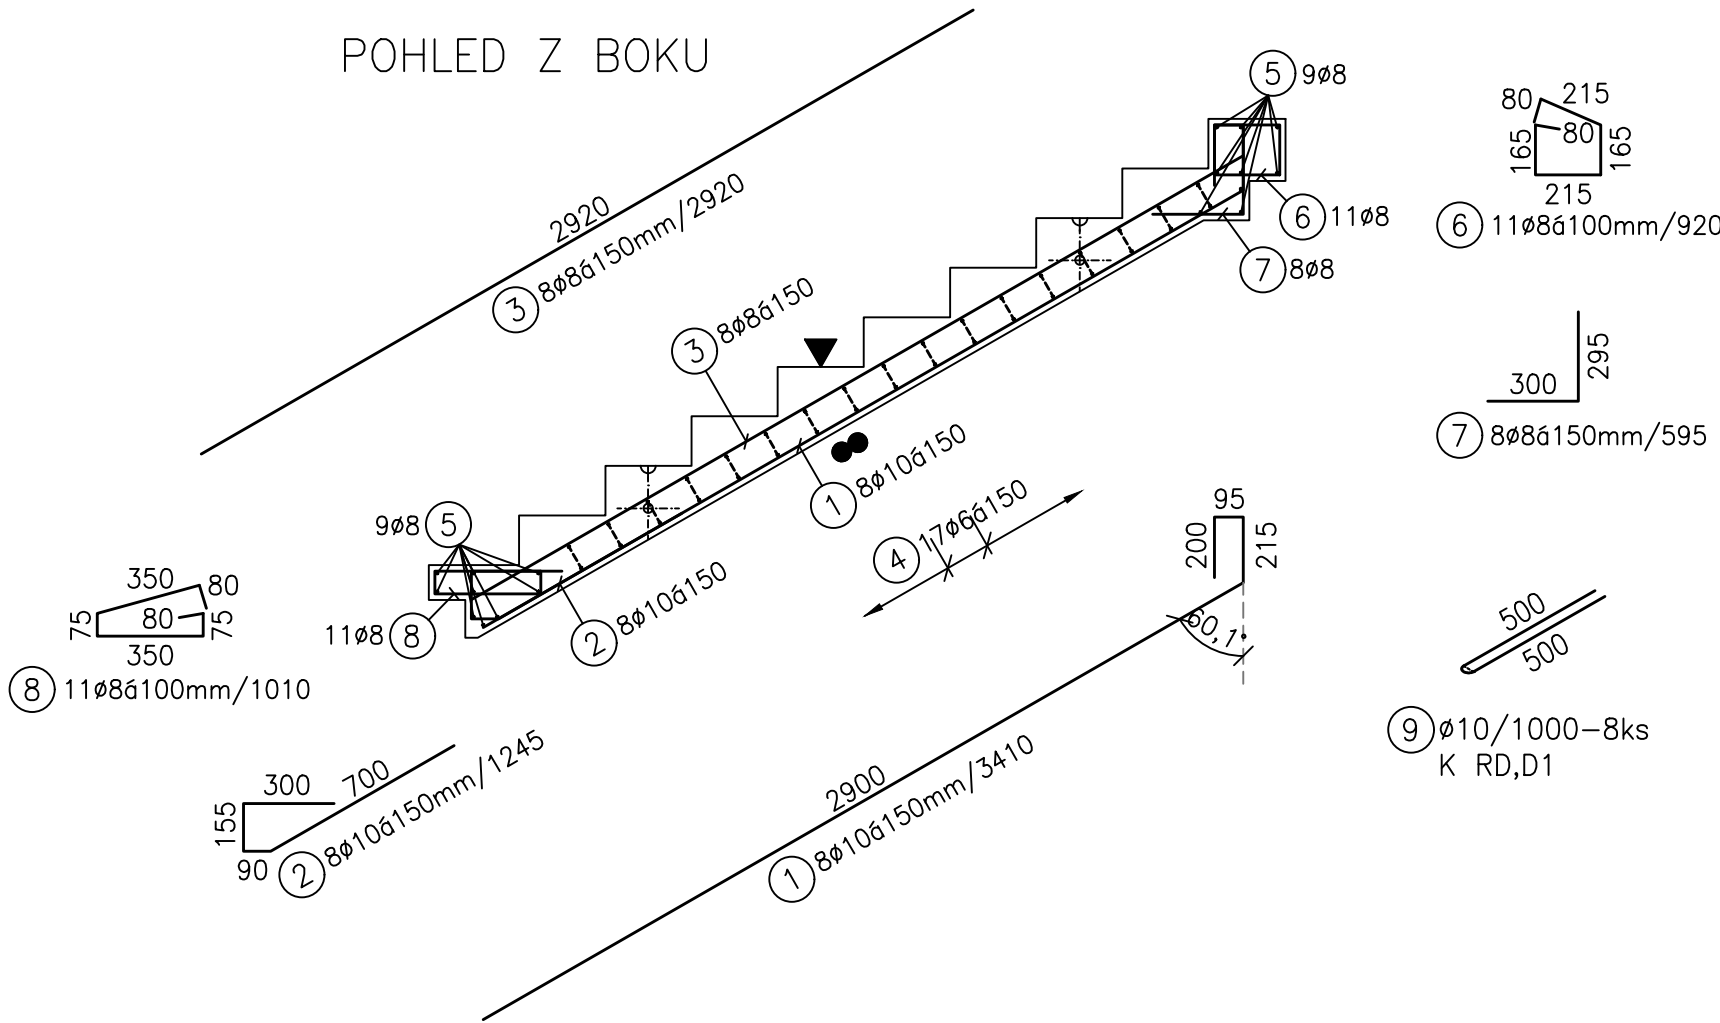

TABULKA VÝZTUŽE

POS	PRŮMĚR	DĚLKA (m)	ks	DĚLKA DLE PROFILU (m)						
				6	8	10	12	14	16	20
1	10	3,410	8			27,28				
2	10	1,245	8			9,96				
3	8	2,920	8		23,36					
4	6	2,480	17	42,16						
5	8	1,080	18		19,44					
6	8	0,920	11		10,12					
7	8	0,595	8		4,76					
8	8	1,010	11		11,11					
9	10	1,000	8			8,00				
CELKEM DĚLKA (m)				42,16	68,79	45,24	0,00	0,00	0,00	0,00
HMOTNOST (kg/m)				0,222	0,395	0,617	0,888	1,208	1,578	2,466
HMOTNOST (kg)				9,36	27,14	27,89	0,00	0,00	0,00	0,00
CELKOVÁ HMOTNOST (kg)				64,39						

POVRCHY

- RUČNĚ HLAZENÝ BETON
- ▲ OTISK Z PODLOŽKY HLADKÝ
- ↘ ZKOSENÁ HRANA LIŠTA 10/10mm

ZABUDOVANÉ DÍLY

- D1 DEHA 2,5t–4ks
- RD ZÁVITOVÉ POUZDRO RD20–4ks

BETON: C35/45 XC4,XD3,XF1,XA1
OCEL: B 500B(A)
OBJEM: 0,760m3
HMOTNOST: 1900kg
KRYTÍ: min.20mm

